




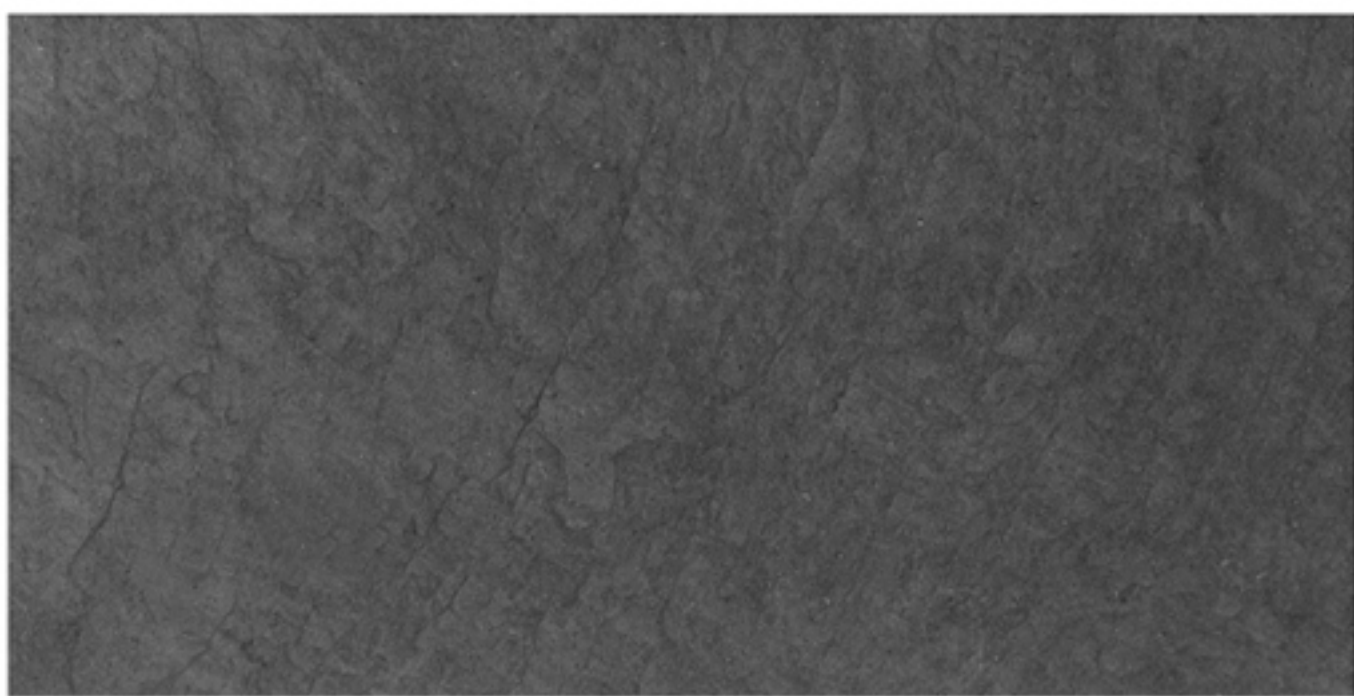


# Williamsburg #5

*Non-carbonated slate formed by tectonic compression.  
Dark grey slate with a riven surface.*



 Quarry Valdacal, Puzmazán (Ourense) Spain.
  Operating since 1971.
  Sizes: 20x20 - 60x45 cm  
Thickness: 5 - 6.5 - 7.5 - 9 mm



### Formats



### Selections



### Technical specifications

ABSORPTION	CARBONATE NON CARBONATED	MOR CHARACTERISTIC	SO <sub>2</sub> EXPOSURE TEST	THERMAL CYCLE TEST	FREEZE THAW TEST
0,21% Code: W1 (< 0,4%)	0,30% Complies (< 1,5%)	Longitudinal 43,5 MPA Transverse 45,7 MPA	S1	T1	Fulfill < 0,6%

### International certifications



European Standard: EN 12326 | French Specifications: NF 02/03 N° 5275 | Belgian Specifications: ATG H848